




Tadiran Battery Sockets



Andon Socket:
BS-2450-02-XXX-XXX-D14
(For plating/terminal options See Below)
Batteries Accepted:
Tadiran TL-2450
Tadiran TLH-2450

CELL SIZE
2450



SECTION A-A

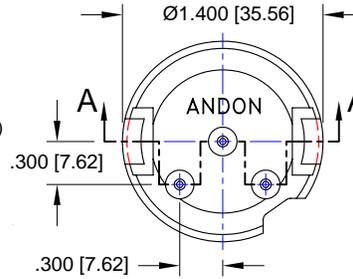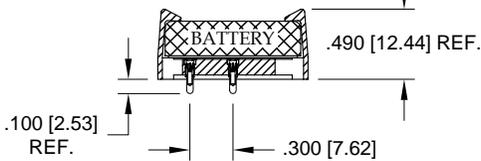

Andon Socket:
BS-5134-03-XXX-XXX-D14
(For plating/terminal options See Below)
Batteries Accepted:
Tadiran TL-2134
Tadiran TL-4934
Tadiran TL-5134
Tadiran TL-5934
Tadiran TLH-5934

CELL SIZE
1/10 D

SECTION A-A

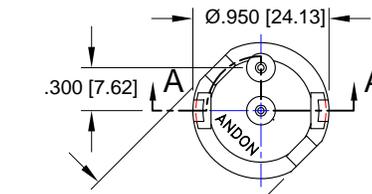
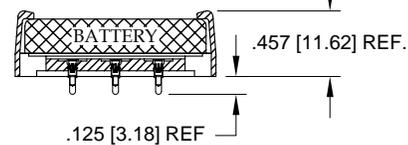


Andon Socket:
BS-5186-02-XXX-XXX-D14
(For plating/terminal options See Below)
Batteries Accepted:
Tadiran TL-2186
Tadiran TL-4986
Tadiran TL-5186

.900 [22.86]
BETWEEN FLATS
FOR STACKABILITY

CELL SIZE
BELL



SECTION A-A

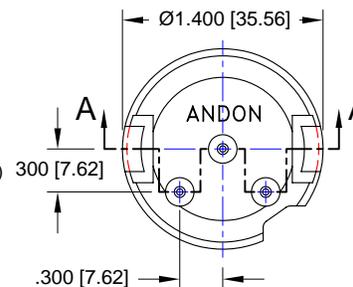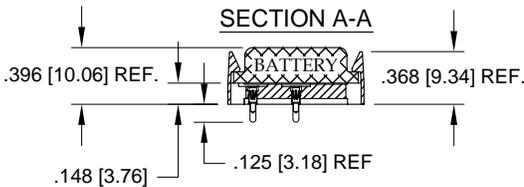


Andon Socket:
BS-5135-03-XXX-XXX-D14
(For plating/terminal options See Below)
Batteries Accepted:
Tadiran TL-2135
Tadiran TL-4935
Tadiran TL-5135
Tadiran TL-5935
Tadiran TLH-5935

CELL SIZE
1/6 D

SECTION A-A

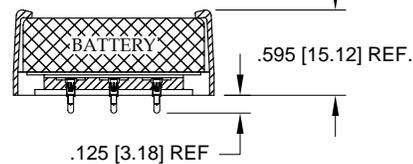

Mounting Hole Diameter:
Ø .055 [1.40] - Ø.065 [1.65]
Accepts Battery Tail Length:
.135 [3.43] - .210 [5.33]
Accepts Tail Diameter:
Ø.025 [0.64] - Ø.037 [0.94]



Mounting Hole Diameter:
Ø .042 [1.07] - Ø.052 [1.32]
Accepts Battery Tail Length:
.115 [2.92] - .132 [3.35]
Accepts Tail Diameter:
Ø.025 [0.64] - Ø.037 [0.94]

TECHNICAL INFORMATION

MATERIAL:

INSULATOR: UL 94V-O
TERMINAL: BRASS, PER ASTM-B16
CONTACT: BeCu, PER ASTM-B194
FORCES: (STANDARD) SEE BELOW

"V" INSERTION: 13.23 oz. MAX. WITH .026 [0.66] DIA. PROBE
WITHDRAWAL: 3.53 oz. MIN. WITH .026 [0.66] DIA. PROBE

©Copyright 2009 Andon Electronics Corporation. All Rights Reserved. This material is protected under US and other copyrights and may not be copied, sold, or redistributed in any form without written permission of Andon Electronics Corporation. Copyrights and trademarks are property of their respective companies. We reserve the right to change specifications without notice. Andon makes no warranty, expressed or implied, as to the suitability of the sockets for the intended purpose.

Ordering Information

BS-XXXX-XX-XXXX-XXX-D14



"ANDON PROPRIETARY INFORMATION"
RoHS Compliant

*Sockets are not drawn to scale Tadiran Battery Socket 09-17-2009